


1. Doors and frames are reinforced for surface applied hardware. Drilling and tapping for the attachment of surface mounted hardware is by others. Doors and frames are prepared and/or reinforced for mortised hardware. Holes for through bolts and trim are by others.
2. Installation of glass and glazing by others.
3. All doors and frames are tagged as directed in the architectural drawings.
4. All frames are drilled for silencers, 3 per strike jamb or 2 per head on paired openings. Silencers are supplied by the hardware supplier.
5. Unless otherwise noted, all 3 sided frame corners are mitered and set up for either knock-down construction or welding as specified.
6. All hardware locations for standard type hardware (hinges and strikes) for doors and frames are as specified in this submittal. All other hardware such as exit devices, EPT's, concealed closers and holders, are prepped to the manufacturer's templated location unless otherwise specified.
7. All hollow metal doors have a 3/4" bottom undercut unless otherwise specified.
8. All doors and frames must be stored as instructed in the "Instructions for Storage, Handling, Finishing, Installation, Maintenance", attached to this submittal to maintain the manufacturer's warranty.

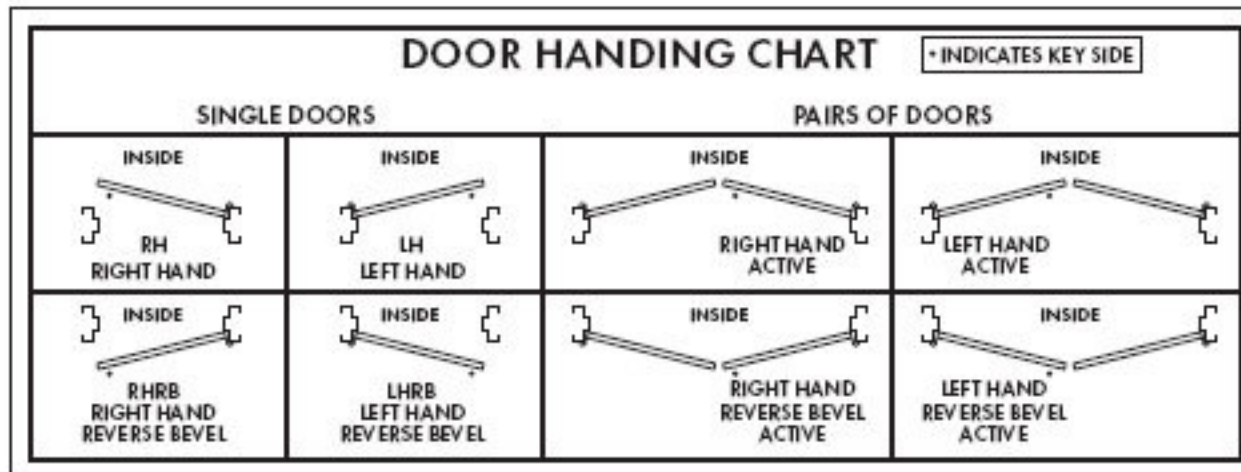

 Custom Metal Products	Project: _____	General Specifications		DWG N.T.S
	Drawn By: _____	Date: _____	Sheet _____ of _____	